



SHAWL EDGING: OUTER CORNER

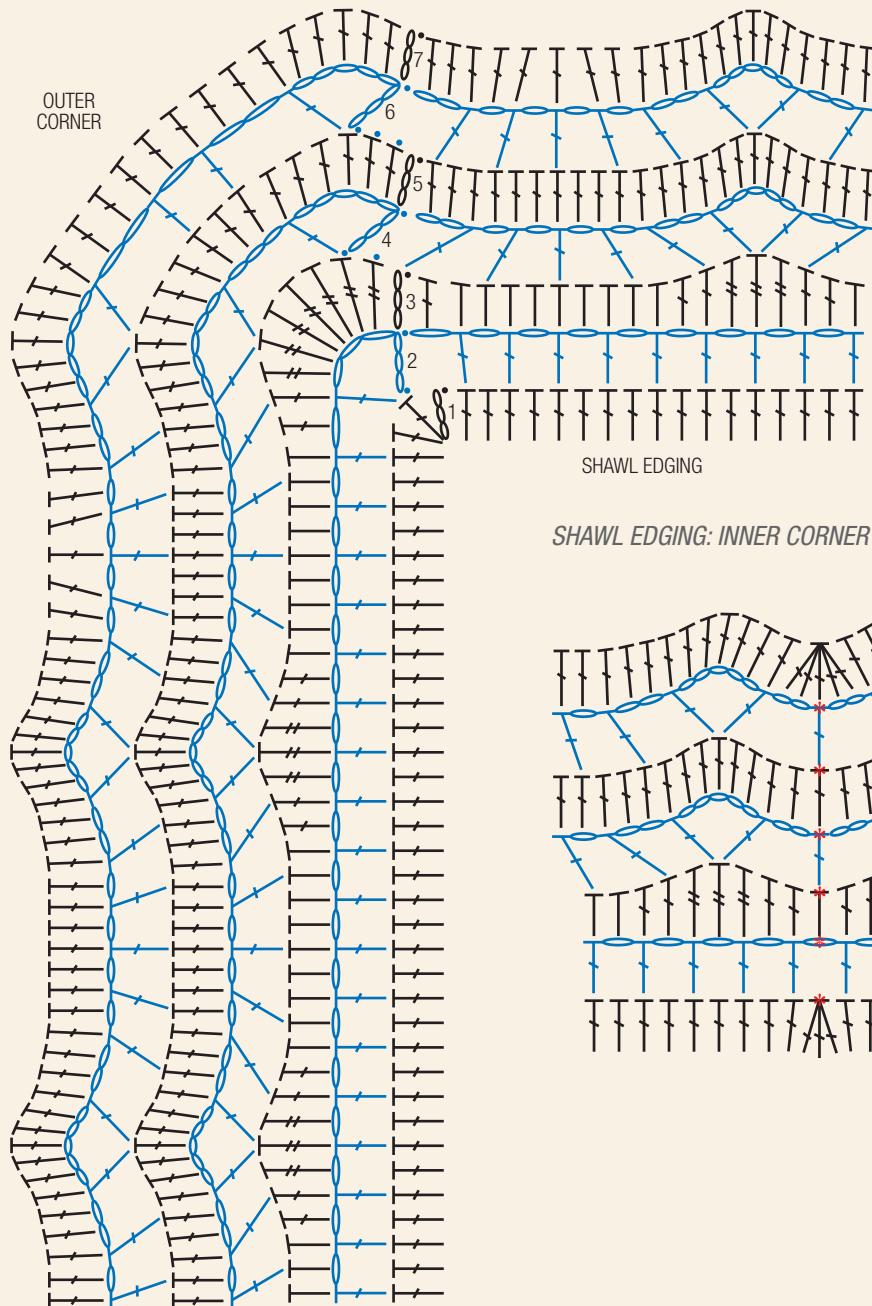

SHAWL EDGING: INNER CORNER

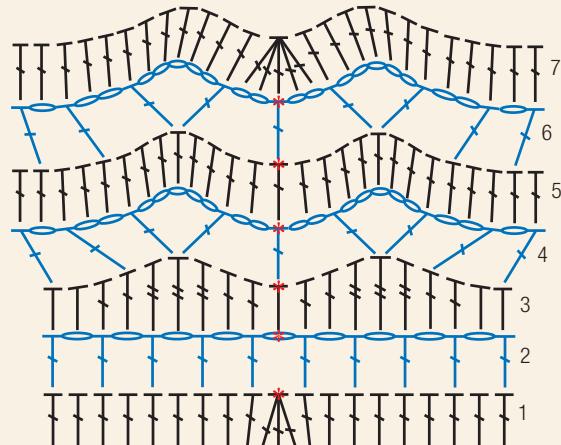

Pattern. Fasten off, leaving a 6" (15 cm) tail.

Second Arm

With WS facing, join yarn with sl st in same corner ch-1 sp holding last dc on Row 1 of First Arm. Rep directions for First Arm.

Shawl Edging

Refer to the following diagrams on p. 18 for assistance: Shawl Edging: Outer Corner and Shawl Edging: Inner Corner.

Rnd 1 (set-up rnd): With RS facing, join yarn with sl st in first st of last row of second arm, ch 3 (counts as dc here and

throughout), 2 dc in same corner st, dc evenly around, working 3 dc in each ch-3 sp, dc in each side ch-1 sp, dc in each sc, dc in each dc, 3 dc in each outside corner sp and dc3tog at inner corner (pm in dc3tog and move marker up as work progresses), working across side A: 80 dc; B: 160 dc; C: 160 dc; D: 80 dc; E: 256 dc; F: