

## Stitch Guide

**2/2RC (2 over 2 right cross):** Sl 2 sts onto cn and hold in back of work, k2, k2 from cn.

**2/2LC (2 over 2 left cross):** Sl 2 sts onto cn and hold in front of work, k2, k2 from cn.

**Cable Lace Panel (panel of 31 sts; also see chart on page 88)**

**Row 1 and all other WS rows:** P2, k2, p4, k2, p11, k2, p4, k2, p2.

**Row 2:** (RS) K2, p2, 2/2RC (see above), p2, k11, p2, 2/2LC, p2, k2.

**Row 4:** K2, p2, k4, p2, [k2tog] twice, [yo, k1] 3 times, yo, [ssk] twice, p2, k4, p2, k2.

**Row 6:** K2, p2, 2/2RC, p2, [k2tog] twice, [yo, k1] 3 times, yo, [ssk] twice, p2, 2/2LC, p2, k2.

**Row 8:** K2, p2, k4, p2, k11, p2, k4, p2, k2.

Rep rows 1–8 for Cable Lace Panel.

**Box Stitch worked in rows (multiple of 4 sts; also see chart)**

**Rows 1 and 2:** [P2, k2] to end.

**Rows 3 and 4:** [K2, p2] to end.

Rep Rows 1–4 for Box St worked in rows.

**Box Stitch worked in the round (multiple of 4 sts; also see chart)**

**Rnds 1 and 2:** [P2, k2] to end.

**Rnds 3 and 4:** [K2, p2] to end.

Rep Rnds 1–4 for Box st worked in the rnd.

## Back

With shorter cir needle, CO 31 sts. Do not join.

Work Rows 1–8 of Cable Lace Panel (see Stitch Guide or chart) until piece measures 16½ (18½, 18½, 18½, 20½, 20½)" (42 [47, 47, 47, 52, 52] cm) from CO edge, ending with a WS row. BO all sts in patt.

### Left Back

With longer cir needle and RS facing, pick up and knit 68 (76, 76, 76, 84, 84) sts evenly spaced along left edge of panel. Do not join.

**Next row:** (WS) Work Row 1 of Box St (see Stitch Guide or chart).

Cont in established patt until piece measures 4½ (5½, 7, 8½, 9½, 11)" (11.5 [14, 18, 21.5, 25, 28] cm) from pick-up row, ending with a WS row.

Change to shorter cir needle.

**Joining rnd:** (RS) Work next row of established patt to end of row, do not turn. Place marker (pm) and join for working in rnds.

Cont with next rnd of established patt worked in rnds until piece measures 4" (10 cm) from joining rnd.

**Next rnd:** Purl.

**Next rnd:** [K2, p2] around.

Rep last rnd until rib measures 1½" (3.8 cm). BO all sts in patt.

### Right Back

With longer cir needle and RS facing, pick up and knit 68 (76, 76, 76, 84, 84) sts evenly along right edge of panel. Do not join.

Work right back same as left.

## Bottom Trim

Place removable m along bottom edge 3¼ (4¼, 5¼, 7¼, 8½, 9½)" (8.5 [11, 14.5, 18.5, 21.5, 25] cm) out from either side of Cable Lace Panel.

With longer cir needle, pick up and knit 60 (68, 80, 88, 100, 108) sts between m, and remove m.

**Next row:** (WS) Knit.

**Next row:** (RS) P1, [k2, p2] to last 3 sts, k2, p1.

**Next row:** (WS) K1, [p2, k2] to last 3 sts, p2, k1.

Rep last 2 rows until rib measures 1½" (3.8 cm), ending with a WS row.

BO all sts loosely in patt.

## Collar

*Note: The stitches for the collar are picked up and knit, followed by a purl ridge row. The purl ridge row makes a good place to decrease or increase if you picked up the incorrect number of stitches.*

With longer cir needle and RS facing, beg at right end of BO edge of bottom trim, pick up and knit 23 sts along side of bottom trim and rem bottom edge, 78 (94, 106, 118, 134, 146) sts evenly across top edge, then 23 sts along rem side of bottom edge and bottom trim—124 (140, 152, 164, 180, 192) sts. Do not join.

**Next row:** (WS) Knit.

**Next row:** (RS) K3, [p2, k2] to last 5 sts, p2, k3.

**Next row:** (WS) P3, [k2, p2] to last 5 sts, k2, p3.

Rep last 2 rows until rib measures 2" (5 cm), ending with a WS row.

BO all sts loosely in patt.

## Finishing


Weave in all ends. Block to finished measurements.






- k on RS, p on WS
- p on RS, k on WS
- k2tog
- ssk
- yo
- 2/2LC (see Stitch Guide)
- 2/2RC (see Stitch Guide)
- pattern repeat

**Cable Lace Panel Chart**

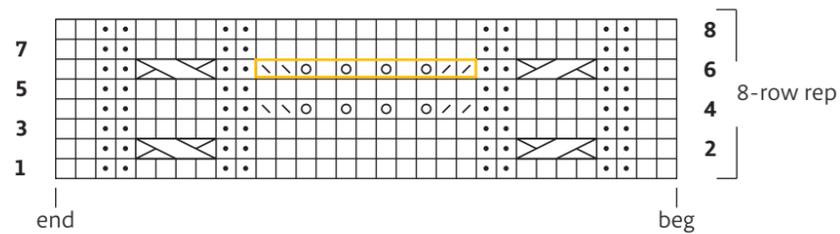

**Box Stitch Chart**



Note: When working Box St back and forth, read RS chart rows from right to left and WS chart rows from left to right; when working in the round, read all chart rows from right to left.

